



## APPLICATION

### High Temperature inductive sensors monitor position of fire-proof ventilation dampers

A manufacturer of fire-resistant air dampers for tunnel ventilation uses High Temperature inductive sensors to monitor damper position. They provide feedback to the ventilation control center, which adjusts dampers and fans as necessary in both normal and emergency operation. For reliable operation at temperatures up to 230°C (446°F), sensor electronics are built into a separate M12 stainless-steel housing.

## INDUSTRIES

Automotive production and supply, paint shops, surface treatment, bakery equipment, food and beverage



*Automated bakery equipment*



*Paintshop in automotive industry*



*Automotive production and supply*



*Brewery production equipment*

# HIGH TEMPERATURE INDUCTIVE SENSORS

## TEMPERATURE RESISTANT UP TO +230°C (+446°F)

Exceptional working conditions demand uncompromising performance, and Contrinex **High Temperature** inductive sensors deliver in every respect. Designed for continuous operation at temperatures up to 180°C (230°C with remote electronics), this range is ideal for the harshest environments, including automotive paint shops, metal-treatment plants and glass manufacturing.

### KEY ADVANTAGES

- ✓ Highest long-term stability due to fully potted electronics
- ✓ Long sensor life
- ✓ Reliable sensing in high-temperature applications
- ✓ Compact construction with integral amplifier for temperatures up to +180°C (+356°F)
- ✓ External amplifier module for temperatures up to +230°C (+446°F)




### PRODUCT OVERVIEW

Housing size mm	M8	M12	M18	M30	M50
Classics (s <sub>n</sub> mm)	2	3/4	5	10/15	25

### ACCESSORIES

Go to page 298 to see all the accessories

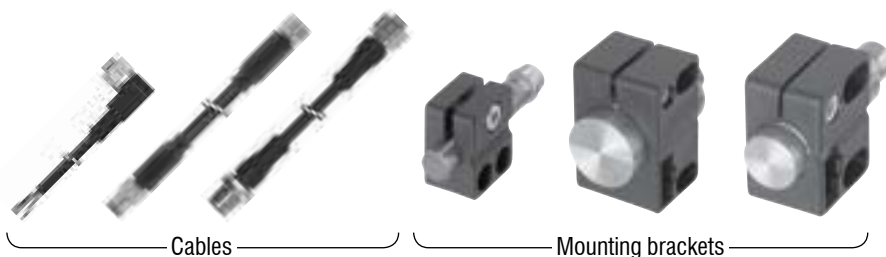

Cables

Mounting brackets

# INDUCTIVE SENSORS HIGH TEMPERATURE



## COMMON FEATURES

Supply Voltage range	10 ... 30 VDC
Output	PNP NO*

\*Other types available: PNP NC, NPN NC

## OUTPUT

DW-A[x]-60[x]		Output	
Connection		[1] NPN NO	[3] PNP NO
[D] Cable	[S] Connector	[V] Pigtail	[2] NPN NC
			[4] PNP NC

Reference key on page 116

## ACCESSORIES

- A** Group A: M8 3-pin  
Sub-group: Field attachable connectors  
Sub-group: Distribution boxes
- B** Group B: M8 4-pin
- C** Group C: M12 4-pin  
Sub-group: Field attachable connectors  
Sub-group: Distribution boxes
- D** Group D: M12 AC/DC 3-pin
- E** Group E: Universal mounting brackets  
Sub-group: Mechanical stops
- F** Group F: Photoelectric mounting brackets
- G** Group G: Photoelectric reflectors
- H** Group H: Sensor tester

Go to page 298 for details


















**CABLES**  
Cable lengths available:  
2 m, 5 m, 10 m  
other customised lengths possible

## FAMILY

OPERATING DISTANCE (mm)	HOUSING SIZE (mm)	HOUSING LENGTH (mm)	HOUSING MATERIAL
2	M8	60	Stainless steel V2A
3	M12	59	Stainless steel V2A
4	M12	63	Stainless steel V2A
5	M18	82	Stainless steel V2A
5	M18	76	Stainless steel V2A
8	M18	82	Stainless steel V2A
10	M30	72	Stainless steel V2A
10	M30	72	Stainless steel V2A
15	M30	83	Stainless steel V2A
15	M30	83	Stainless steel V2A
15	M30	83	Stainless steel V2A
20	M50	76	Stainless steel V2A
20	M50	55	Stainless steel V2A
25	M50	68	Stainless steel V2A
25	M50	76	Stainless steel V2A

CLASSICS - SERIES 600



CABLE	CONNECTION	SWITCHING FREQUENCY (Hz)	MOUNTING		AMBIENT TEMPERATURE	DEGREE OF PROTECTION	PART REFERENCE*	ACCESSORIES (SEE PAGE 90)
			EMB. 	NON-EMB. 				
 Silicone	Silicone, 2 m, 3 wire	600	Embed.		0...+140°C	IP67	DW-HD-623-M8-100	H
 Silicone	Silicone, 2 m, 3 wire	500	Embed.		0...+150°C	IP67	DW-HD-603-M12-200	H
 Silicone	Silicone, 2 m, 3 wire	500	Non-Embed.		0...+150°C	IP67	DW-HD-613-M12-200	H
 PTFE	PTFE, 2 m, 3 wire	400	Embed.		0...+180°C	IP67	DW-HD-603-M18-310	H
 Teflon+PUR	PTFE, 3 m + PUR, 2 m, 3 wire	300	Embed.		0...+230°C	IP67	DW-HD-603-M18-411	H
 PTFE	PTFE, 2 m, 3 wire	400	Non-embed.		0...+180°C	IP67	DW-HD-613-M18-310	H
 PTFE	PTFE, 2 m, 3 wire	200	Embed.		0...+180°C	IP67	DW-HD-603-M30-310	H
 Teflon+PUR	PTFE, 3 m + PUR, 2 m, 3 wire	200	Embed.		0...+230°C	IP67	DW-HD-603-M30-411	H
 Teflon+PUR	PTFE, 3 m + PUR, 2 m, 3 wire	150	Non-embed.		0...+230°C	IP67	DW-HD-613-M30-411	H
 PTFE	PTFE, 2 m, 3 wire	200	Non-embed.		0...+180°C	IP67	DW-HD-613-M30-310	H
 Teflon+PUR	PTFE, 5 m + PUR, 2 m, 3 wire	150	Non-embed.		0...+230°C	IP67	DW-HD-613-M30-508	H
 Silicone	Silicone, 2 m, 3 wire	100	Quasi-embed.		0...+180°C	IP67	DW-HD-603-M50-300	H
 Teflon+PUR	PTFE, 3 m + PUR, 2 m, 3 wire	150	Quasi-embed.		0...+230°C	IP67	DW-HD-603-M50-411	H
 Teflon+PUR	PTFE, 3 m + PUR, 2 m, 3 wire	150	Non-Embed.		0...+230°C	IP67	DW-HD-613-M50-411	H
 Silicone	Silicone, 2 m, 3 wire	100	Non-embed.		0...+180°C	IP67	DW-HD-613-M50-300	H







## APPLICATION

### Reliable presence sensing despite elevated temperature for automated laundry system

Highly automated laundry systems use inductive sensors for presence sensing in ironing-lane processes. Temperatures in this environment are too high for standard sensors, but pose no problem for temperature-resistant sensors of the Extra Temperature range. They operate reliably at temperatures up to 120°C (248°F), are well protected against ambient humidity (IP67) and include an integral IO-Link interface for communication with modern control and management systems.

## INDUSTRIES

Automotive production and supply, machine tool, energy, aerospace



*Aircraft door monitoring*



*Automotive part sensing*



*Machine tools*




*Aerospace*

# EXTRA TEMPERATURE INDUCTIVE SENSORS

## TEMPERATURE RESISTANT UP TO +120°C (+248°F)


Contrinex **Extra Temperature** inductive sensors offer the ideal solution for position- and presence-sensing applications at temperatures up to 120°C (248°F). Industrial processes often generate more heat than is suitable for standard sensors. In such environments, the stainless-steel construction and robust electronics of this range ensure reliable, accurate operation and minimal downtime.

### KEY ADVANTAGES

- ✓ Temperature resistant up to +120°C (+248°F)
- ✓ Excellent long term reliability
- ✓ Outstanding accuracy
- ✓ High quality ASIC sensors with  **IO-Link** interface




### PRODUCT OVERVIEW

 IO-Link				
Housing size mm	M5	M8	M12	M18
Classics (s <sub>n</sub> mm)	0.8	4	2...4	5

### ACCESSORIES

Go to page 298 to see all the accessories

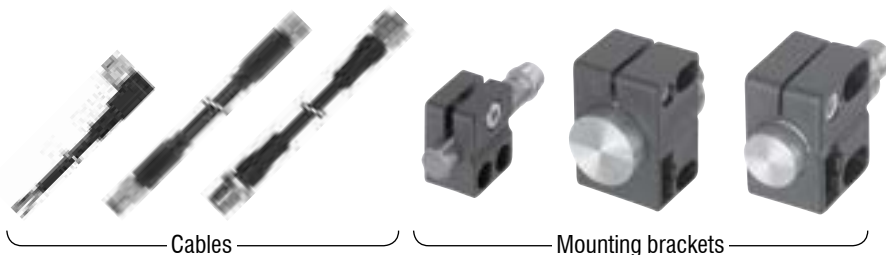

# INDUCTIVE SENSORS EXTRA TEMPERATURE



## COMMON FEATURES

<b>Supply Voltage range</b>	10 ... 30 VDC
<b>Output</b>	PNP NO*

\* Other types available: PNP NC, NPN NC

\*\* Pigtail versions available

## OUTPUT

DW-A[x]-60[x]		<b>Output</b>
<b>Connection</b>	[1] NPN NO	[3] PNP NO
	[2] NPN NC	[4] PNP NC
<b>Connection</b>	[D] Cable	[S] Connector
	[V] Pigtail	

Reference key on page 116

## ACCESSORIES

- A** Group A: M8 3-pin  
Sub-group: Field attachable connectors  
Sub-group: Distribution boxes
- B** Group B: M8 4-pin
- C** Group C: M12 4-pin  
Sub-group: Field attachable connectors  
Sub-group: Distribution boxes
- D** Group D: M12 AC/DC 3-pin
- E** Group E: Universal mounting brackets  
Sub-group: Mechanical stops
- F** Group F: Photoelectric mounting brackets
- G** Group G: Photoelectric reflectors
- H** Group H: Sensor tester

Go to page 298 for details

**CABLES**  
Cable lengths available:  
2 m, 5 m, 10 m  
other customised lengths possible

## FAMILY

OPERATING DISTANCE (mm)	HOUSING SIZE (mm)	HOUSING LENGTH (mm)	HOUSING MATERIAL
0.8	M5	25	Stainless steel V2A
0.8	M5	25	Stainless steel V2A
4	M8	36	Stainless steel V2A
4	M12	44.3	Nickel-plated brass
2	M12	50	Nickel-plated brass
5	M18	35	Chrome-plated brass

## CLASSICS – SERIES 600





CABLE**	CONNECTOR**	IO-Link	SWITCHING FREQUENCY (Hz)	MOUNTING		AMBIENT TEMPERATURE	DEGREE OF PROTECTION	PART REFERENCE*	ACCESSORIES (SEE PAGE 86)
				EMB.	NON-EMB.				
			5,000	Embed.		-25 ... +120°C	IP67	DW-AD-601-M5-735	E H
		IO-Link	5,000	Embed.		-25 ... +120°C	IP67	DW-AD-603-M5-735	E H
		IO-Link	3,500	Non-embed.		0 ... +85°C	IP67	DW-AS-633-M8-732	A E H
			2,000	Non-embed.		-25 ... +100°C	IP67	DW-AD-613-M12-733	E H
			3,000	Embed.		-25 ... +100°C	IP67	DW-AD-603-M12-734	E H
		IO-Link	2,000	Embed.		-40 ... +100°C	IP67	DW-AD-603-M18-718	E H





# INDUCTIVE SENSORS REFERENCE KEY

## DW-AD-503-M8E (-12X/-XXX)

### INDUCTIVE SENSOR DW

#### SENSOR TYPE

Conventional	A
2-wire DC (NAMUR excepted)	D
High-temperature	H
Food and sea-water	L
Maritime	M

#### CONNECTION

Cable	D
Connector	S
Cable + connector	V

#### SERIES

500 / 520 (Extra Distance)	5
600 / 620 (Classics)	6
700 (Full Inox)	7
Embeddable / quasi-embeddable	0
Non-embeddable	1
Increased operating distance, (quasi-)embeddable	2
Increased operating distance, non-embeddable	3

#### OUTPUT

NPN NO	1
NPN NC	2
PNP NO	3
PNP NC	4
PNP changeover	A
NPN changeover	B

### SHORT / SPECIAL EXECUTIONS

Series E (impervious)	E
Series 700P (all-metal and high-pressure resistant)	G

### HOUSING SIZE

Threaded	
M4	4
M5	5
M8	8
M12	12
M18	18
M30	30
M50	50

Smooth	
Ø3 mm	3
Ø4 mm	4
Ø6.5 mm	65
Ø8 mm	80
5 × 5 mm	5
8 × 8 mm	8
20 × 32 mm	23
40 × 40 mm	44

### HOUSING

Threaded cylindrical housing	M
Rectangular housing	C
Smooth cylindrical housing	0
High-pressure resistant	P

### OUTPUT

2-wire DC	
NO / NAMUR	5
NC	6

2-wire AC/DC	
NO	7
NC	8
Analog	9

# INTRODUCTION

## TECHNOLOGY

Contrinex inductive devices work according to one of three different technologies. All involve the generation of an alternating magnetic field that emerges at the sensing face. The presence of a conductive, generally metallic, object influences this field in a way that can be detected and evaluated by built-in electronics. All Contrinex ASIC sensors are IO-Link enabled in PNP NO versions.

## TECHNOLOGY FAMILIES

### CLASSICS FAMILY

Conventional technology, engineered by Contrinex

The **Classics** family uses conventional inductive sensor technology, but with the benefit of a Contrinex ASIC (application specific integrated circuit). ASIC technology ensures reliability, stability and ease of commissioning, due to low variation. Sensors in this family achieve operating distances up to 2× the industry standard. All ASIC sensors in the **Classics** family are IO-Link enabled in PNP NO versions.

**Classics** sensors have a conventional oscillator and coil generating a high-frequency magnetic field that emerges at the sensing face. Any metallic object found in this field absorbs some of the energy, which is in turn detected and evaluated by built-in electronics (Fig. 1).

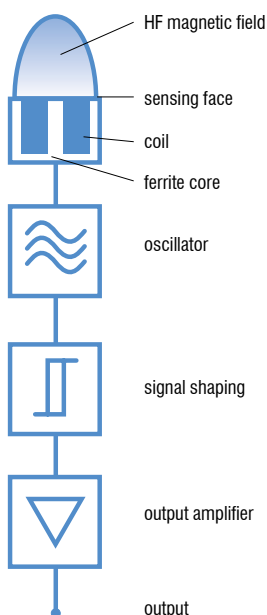


Fig. 1: Conventional inductive sensor technology, as used in the Classics family

Ferromagnetic metals (steel, nickel, cobalt) absorb the most energy. The achievable operating distances are therefore greatest with these metals. Non-ferromagnetic metals, such as aluminum, absorb less energy. As a result, operating distances are lower (approx. 25... 45% of those on steel).

The **Classics** technology family (series 600) includes devices from the ranges **Basic**, **Miniature**, **Extra Pressure**, **Extra Temperature**, **High Temperature**, **Washdown** and **2-Wire**.

### EXTRA DISTANCE FAMILY

Increased stability for exceptionally long operating distance

The **Extra Distance** family is based on the **Condist®** oscillator developed by Contrinex. Sensors benefit from **up to 4× the standard** operating distance, keeping them out of harm's way in rugged, industrial environments. Sensor lifetime is therefore increased.


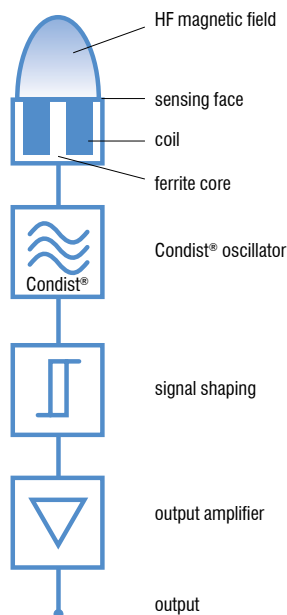


Fig. 2: Contrinex's Condist® inductive sensor technology, as used in the Extra Distance family

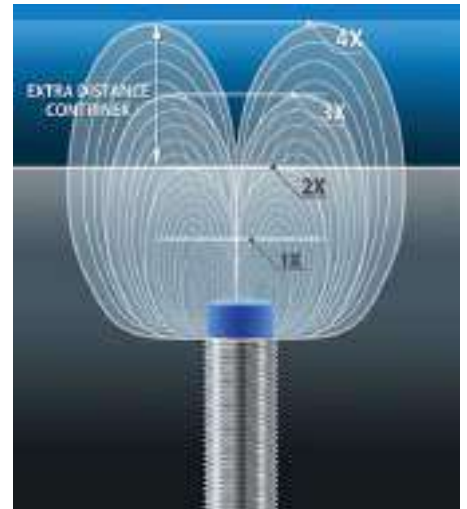

Like **Classics** family sensors, these also generate a high-frequency magnetic field that emerges at the sensing face (Fig. 2). Again, the resulting effect is that any metallic object entering the field absorbs energy from it.

However, the oscillator and the subsequent signal evaluation circuit are completely different, with the objective of achieving a significantly **better stability** with respect to environmental influences, in particular temperature. The most important contribution to this comes from the Contrinex **Condist®** oscillator.

Improved stability permits the switch point to be further away, leading to **long operating distances** on ferromagnetic metals (Fig. 3). Sensors with this technology also react particularly well to **narrow targets**, e.g. small screws, wires and foils.

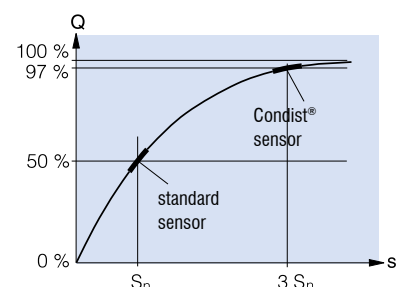



Fig. 3: Extra Distance family sensors have a longer operating distance, due to Condist® oscillator technology

Apart from the **Condist®** oscillator, all other assemblies are equivalent to the **Classics** family. Material

dependencies and other properties are also the same as for **Classics** family sensors.

Special attention has been paid to **meet the relevant standards as much as possible**, so that easy **interchangeability** with conventional devices is guaranteed. Great emphasis has been placed on very good EMC resistance and on perfect sealing against liquid penetration.

The **Extra Distance** technology family includes devices from the **Basic, Miniature, Extra Pressure, High Pressure** and **Analog Output** ranges. This technology is used in series 500 devices.

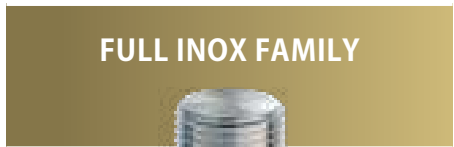

**All-round stainless steel protection – practically indestructible**

The **Full Inox** family is based on Contrinex's Condet® technology. These one-piece stainless steel sensors are not only the most durable on the market, they also offer long operating distances on any conductive metal.

**Full Inox** sensors also function according to inductive technology. However, the coil which generates



the magnetic field is not part of the oscillator (Fig. 4). Instead, the field is generated by periodic, short transmitter current pulses, which flow through the coil (Fig. 5). This field induces a voltage in the target which, in turn, generates a current flow in it. When the **transmitter current pulse** is switched off, the current in the object dies away, causing a **voltage to be induced** in the transmitting coil (Fig. 6).

This voltage generates the signal required, and is in principle **independent of the field's energy loss**. Therein lies the fundamental advantage of this technology, since the field energy losses, which are evaluated in conventional sensors, are subject to a number of undesirable environmental and material influences. Condet® technology allows the sensor, including its face, to be fully encapsulated in a protective, stainless steel housing, with the added security of long operating distances.

The coupling between the target and the coil is rather **like a transformer**, and is hence **temperature independent** and only **slightly influenced**

**by the target's material**. Operating distances are therefore identical on steel and aluminum. Only metals which are non-ferromagnetic and also have poor electrical conductivity give a reduced usable signal.

The **Full Inox** family includes devices from the **Basic, Miniature, Extreme, High Pressure, Wash-down, Weld-Immune, Chip-Immune, Maritime** and **Double-Sheet** ranges.

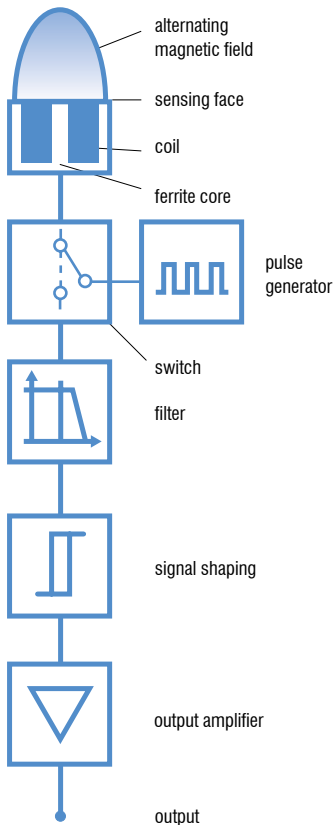


Fig. 4: Full Inox family sensors use Condet® pulse generator technology instead of an oscillator

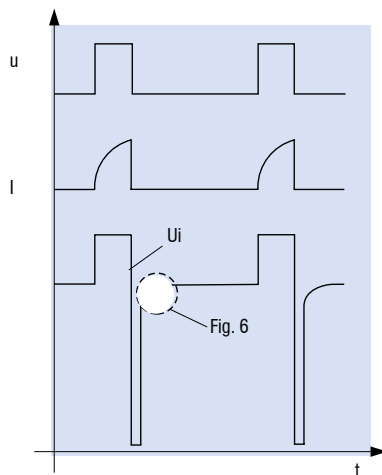


Fig. 5: Evolution of main signals

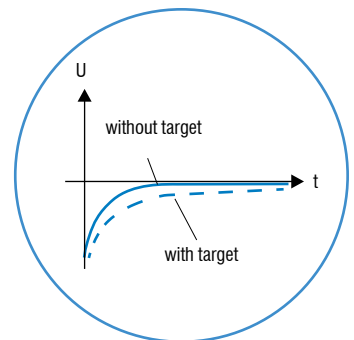


Fig. 6 (detail fig. 5): Effect of a target on the measured signal



### Data monitoring

Switching state is monitored continuously. This not only monitors the signal itself, but also the state at 80% of the switching distance. One can therefore ensure that the sensor is not working at the limit of its specifications.

✓ ✓ ✓ ✓



### Diagnosis

The operating state of the sensor is checked. In case of open circuit, under-voltage, LC oscillator failure or installation of the wrong sensor, information is provided directly through IO-Link to enable fast repair, maintenance and replacement.

✓ ✓ ✓ ✓



### Detection counter

Detection events are counted. By registering the number of detections, it is possible to calculate the speed or number of parts. The counter can be reset by means of a unique IO-Link message.


✓ ✓ ✓



### Temperature

The internal temperature of the sensor is measured continuously, which provides an indication about the ambient temperature in the application. Moreover, the maximum temperature measured is saved for diagnosis and preventive maintenance purposes.

✓ ✓ ✓



### Switching timer

The timing of output switching can be configured. Depending on the needs of an application, output switching can be delayed or the duration stretched through programming.

✓ ✓ ✓ ✓



### NO/NC selection

The output switching mode can be selected as NO or NC. A single sensor type is configurable for the various needs of an application. This helps reduce the number of different sensor types required in stock.

✓ ✓ ✓



### Sensitivity and teach

The sensitivity of the sensor can be adjusted remotely by changing the threshold. Alternatively, the teach function can be used to adapt the threshold to the application. Calibrated sensing ranges ensure easy sensor replacement by uploading the existing sensitivity to the replacement sensor.

✓ ✓ ✓



### Light-ON/Dark-ON selection

The output switching mode can be selected as Light-ON or Dark-ON. A single sensor type is configurable for the various needs of an application. This helps reduce the number of different sensor types required in stock.

✓



### Sensor mode

Three different modes are selectable depending on the application needs: "Normal", "Fast" and "Fine". "Normal" mode is a good balance of speed and precision. In "Fast" mode, speed is higher and in "Fine" mode precision is higher.

✓ ✓ ✓



### Sequence selection

For cross-talk immunity with through-beam sensors, up to nine different emitting sequences can be selected to pair the emitter with the receiver.

✓

\* Functionalities may vary depending on series and sensor type



# INTRODUCTION

## CONTRINEX



*Contrinex Headquarters, Switzerland*

Contrinex is a leading manufacturer of sensors for factory automation. The Swiss company, headquartered in Corminboeuf near Fribourg (CH), has a unique and innovative range of products whose features far surpass those of standard sensors.

Since its foundation in 1972 by Peter Heimlicher, Dipl Ing ETH, Contrinex has grown from a one-man operation to a multinational group with over 580 employees worldwide. More than 13 subsidiaries cover the core markets in Europe, Asia, North and South America.

### AT A GLANCE

- Technology leading manufacturer of inductive and photoelectric sensors as well as safety and RFID systems
- World market leader for miniature sensors, sensors with long operating distances and devices for particularly demanding operating conditions (all-metal, high-pressure and high-temperature resistant sensors)
- Represented in over 60 countries worldwide, headquarters in Switzerland
- 8,000 products

**Technology leader for sensor intelligence and industrial RFID**

## INTELLIGENT SENSORS FOR THE 4<sup>TH</sup> INDUSTRIAL REVOLUTION: INDUSTRY 4.0

### Fit for the future with IO-Link

Intelligent sensors are the fundamental building blocks of modern smart factories. They enable sensor-supported production resources (machines, robots, etc.) to configure, control, manage and optimize themselves. Precise, reliable sensor data is now more essential than ever.


Sensors from Contrinex, the leader in intelligent sensor technology, ensure excellent data quality. To communicate that data, all Contrinex inductive and photoelectric ASIC sensors will be equipped with IO-Link as standard. Customers use either the sensor's binary PNP output or its intelligent IO-Link interface. Both are available in one and the same device. Another advantage is the fact that, with Contrinex sensors, there is no extra charge for IO-Link. This makes them not only quick and simple to install, but also highly economic.

As the first standardized IO technology worldwide (IEC 61131-9) for communication with sensors and actuators, IO-Link is crucial to the 4<sup>th</sup> Industrial Revolution. By installing Contrinex ASIC sensors with IO-Link, users can make themselves fit for the future.

# CUSTOMIZATION

Contrinex has extensive experience in product customization and brand labelling. Over the years, a team of specialists has worked with clients to design, develop and manufacture numerous unique products that meet individual specifications. Custom solutions can range from a very simple adaptation such as a special connector or cable to a new design with special signals, technical characteristics or a customized housing. The company is also equipped to meet branding requirements for product color, packaging, labelling and logos.

Production sites are available worldwide, so products can be manufactured for best availability and in quantities that suit the client's requirements. Quality is assured by vigorous lab testing, pre-shipment inspections and compliance with market standards. All production sites are open to quality audits by clients.

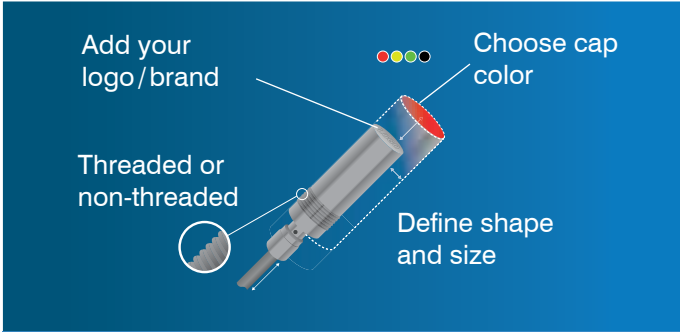


- ✓ Housing shape and size
- ✓ Cable length
- ✓ Embeddable / non-embeddable
- ✓ Threaded / non-threaded
- ✓ Selected technical characteristics

# LIVE SENSOR DATA FOR IoT





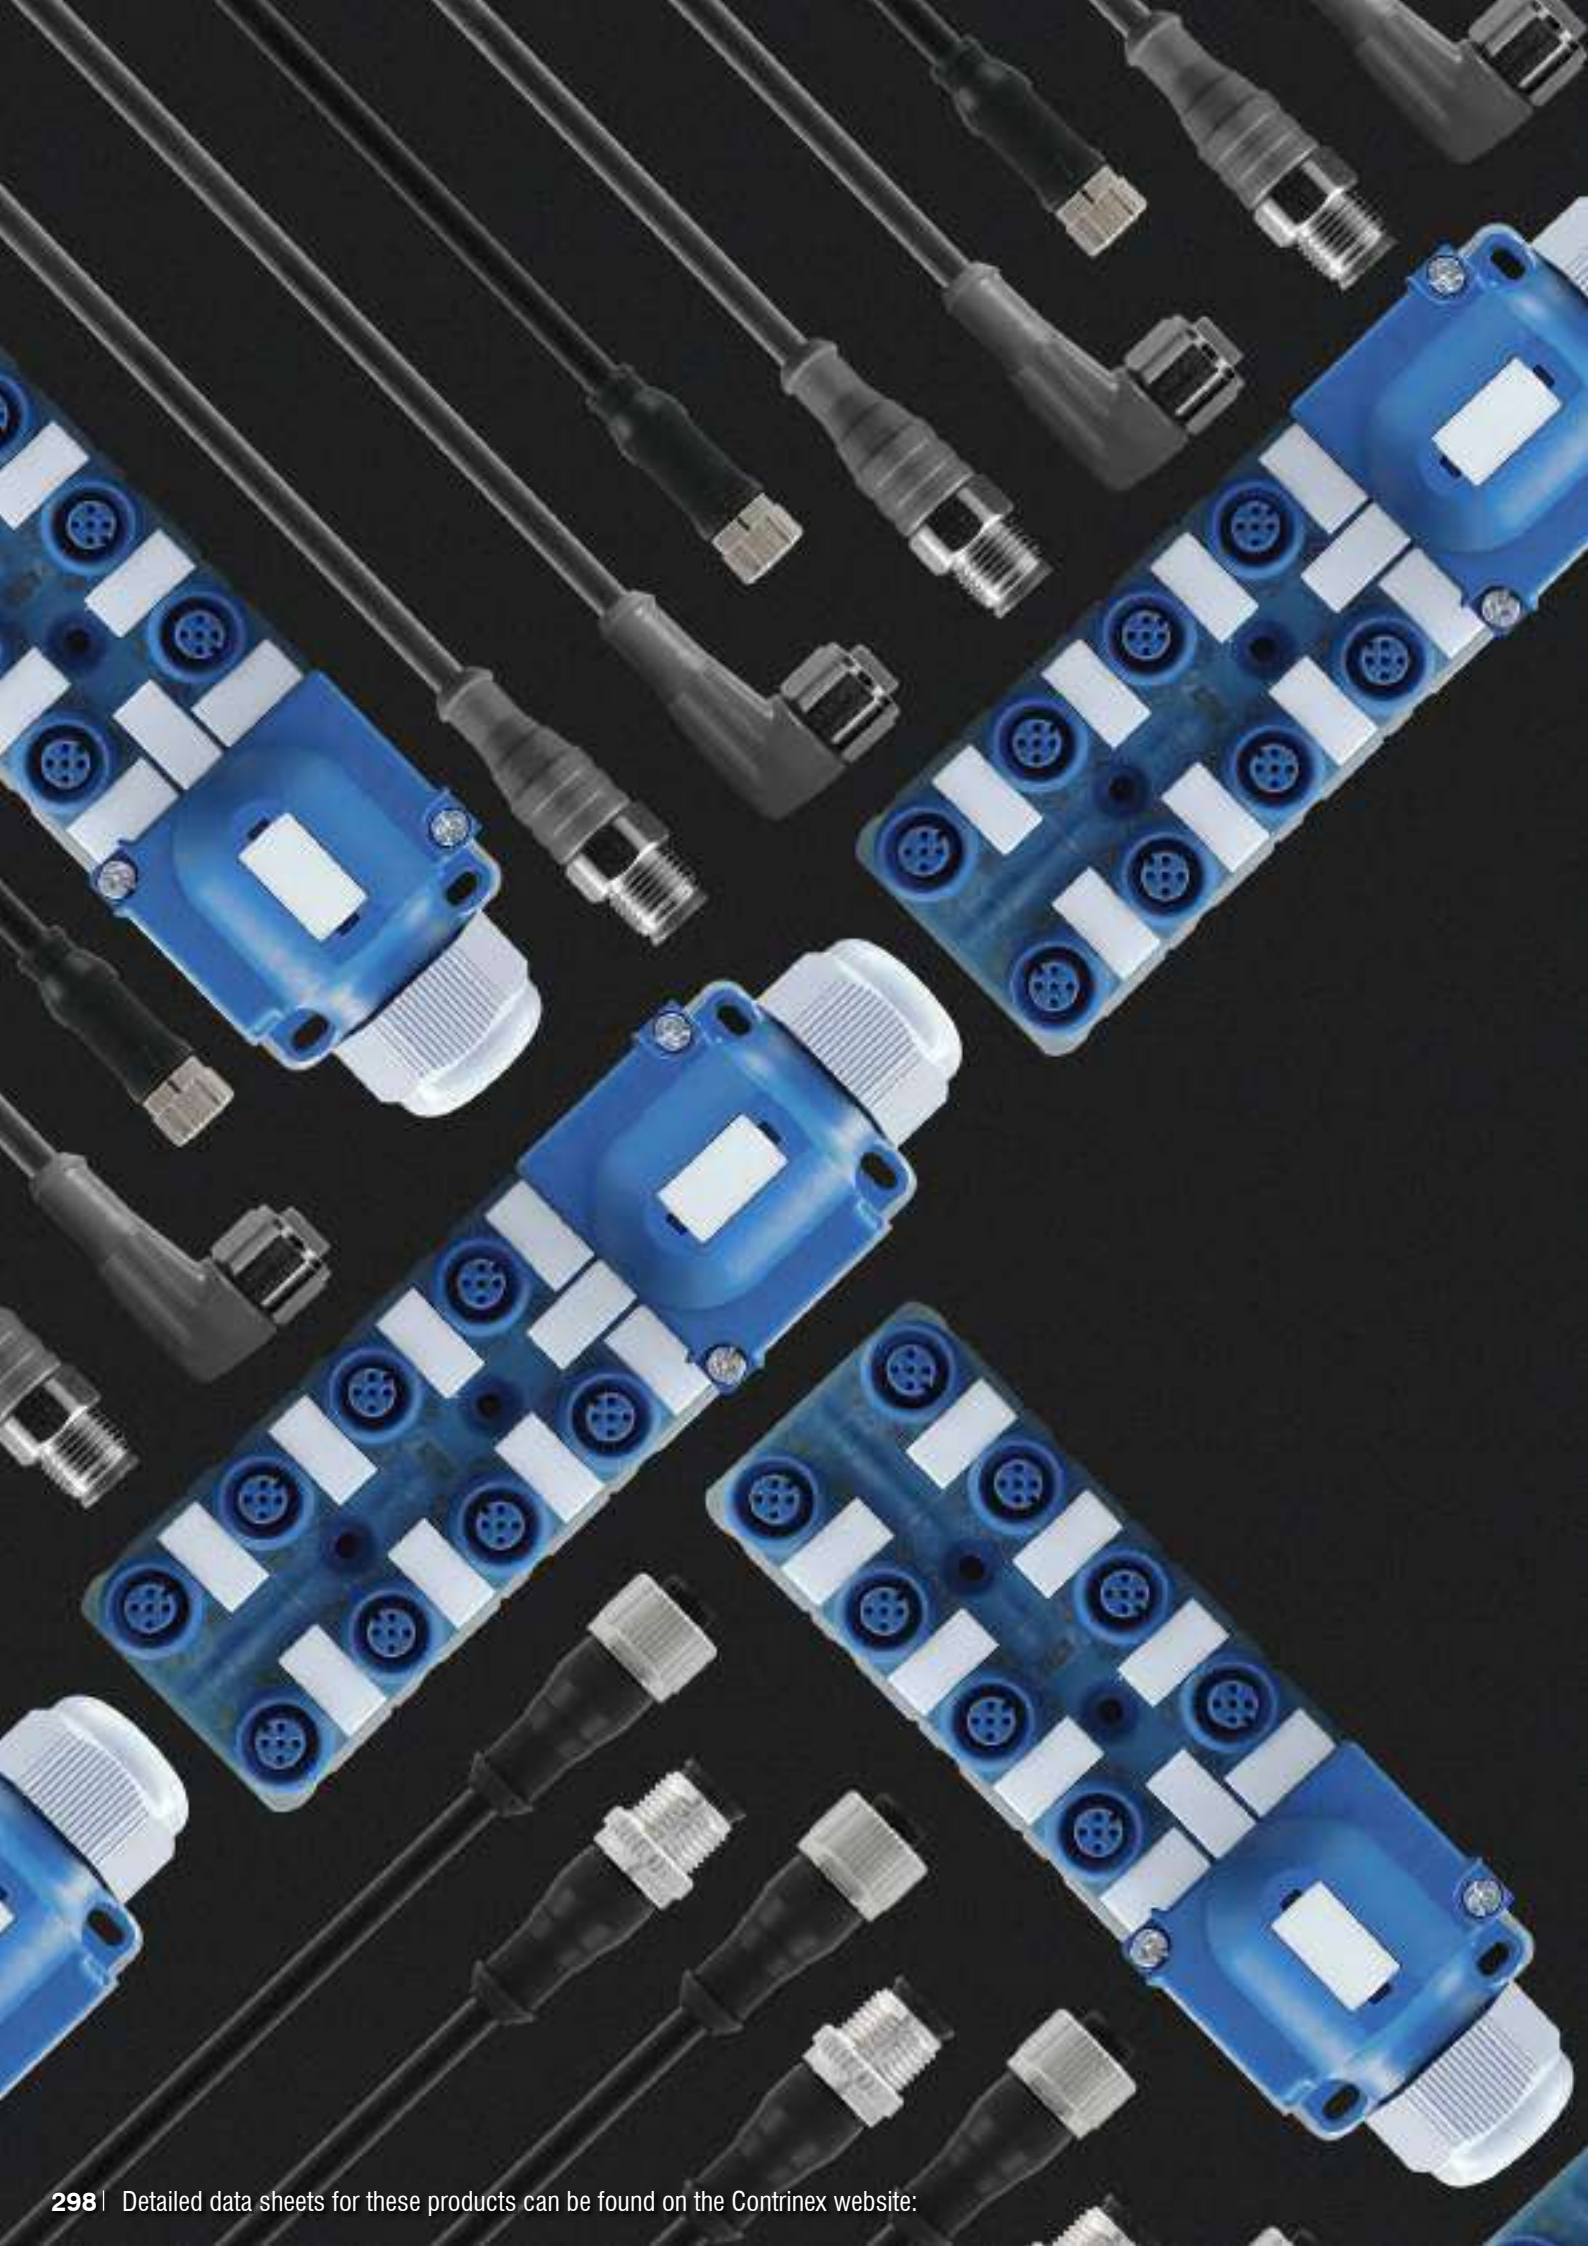



# ACCESSORIES

## HIGHLIGHTS

- ✓ Comprehensive cable and connector program
- ✓ IP69K and Ecolab-certified cables for the food and beverage industry (on demand)
- ✓ UL-approved cables and connectors
- ✓ Cables with straight or right-angle sockets
- ✓ Distribution boxes
- ✓ Field-attachable connectors
- ✓ T-connectors (on demand)
- ✓ User-friendly standard portfolio
- ✓ Sensor testers for fast field checks
- ✓ Sensor mounting clamps
- ✓ Bases for mounting clamps
- ✓ Mechanical stops
- ✓ Amplifiers for 3-wire and NAMUR sensors (on demand)



## INDUCTIVE & PHOTOELECTRIC CABLES

### Group A

#### M8 3-PIN



open ended wire







connecting cables

CONNECTOR	PINS	CONFIG.	CABLE MATERIAL	CABLE LENGTH	WIRE	CABLE CONNECTION END	PINS	PART REFERENCE
M8	3-pole	straight	PUR	2 m	3	OPEN CABLE	–	S08-3FUG-020
M8	3-pole	straight	PUR	5 m	3	OPEN CABLE	–	S08-3FUG-050
M8	3-pole	straight	PUR	10 m	3	OPEN CABLE	–	S08-3FUG-100
M8	3-pole	right angle	PUR	2 m	3	OPEN CABLE	–	S08-3FUW-020
M8	3-pole	right angle	PUR	5 m	3	OPEN CABLE	–	S08-3FUW-050
M8	3-pole	right angle	PUR	10 m	3	OPEN CABLE	–	S08-3FUW-100
M8	3-pole	straight	PVC	2 m	3	OPEN CABLE	–	S08-3FVG-020
M8	3-pole	straight	PVC	5 m	3	OPEN CABLE	–	S08-3FVG-050
M8	3-pole	straight	PVC	10 m	3	OPEN CABLE	–	S08-3FVG-100
M8	3-pole	right angle	PVC	2 m	3	OPEN CABLE	–	S08-3FWW-020
M8	3-pole	right angle	PVC	5 m	3	OPEN CABLE	–	S08-3FWW-050
M8	3-pole	right angle	PVC	10 m	3	OPEN CABLE	–	S08-3FWW-100
M8	3-pole	straight	PUR	0.6 m	–	M8	3	S08-3FUG-006-08MG
M8	3-pole	straight	PUR	2 m	–	M8	3	S08-3FUG-020-08MG
M8	3-pole	straight	PUR	5 m	–	M8	3	S08-3FUG-050-08MG
M8	3-pole	straight	PVC	0.6 m	–	M8	3	S08-3FVG-006-08MG
M8	3-pole	straight	PVC	2 m	–	M8	3	S08-3FVG-020-08MG
M8	3-pole	straight	PVC	5 m	–	M8	3	S08-3FVG-050-08MG











## FIELD ATTACHABLE CONNECTORS

CONNECTOR	PINS	CONFIG.	OUTER Ø	WIRE Ø	PART REFERENCE
 M8	3-pole	straight	3.0–5.0	0.08–0.38	S08-3FNG-000-NNT1
 M8	3-pole	straight	4.0–8.0	0.14–0.50	S08-3FNG-000-NNT2
 M8	3-pole	straight	3.0–5.0	0.08–0.38	S08-3MNG-000-NNT1
 M8	3-pole	straight	4.0–8.0	0.14–0.50	S08-3MNG-000-NNT2



## DISTRIBUTION BOXES

CONNECTOR	PINS	NUMBER OF CONNECTIONS	CONNECTION TYPE	PART REFERENCE
 M8	3-pole	Universal – Hood	No cable	V08-30PE-000-NNN
 M8	3-pole	10 Plug Distribution box	PUR cable 5 m	V08-31PD-050-UYN
 M8	3-pole	10 Outputs – Hood	PUR cable 5 m	V08-31PH-050-UNN
 M8	3-pole	4 Plug Distribution box	No cable (hood needed)	V08-34PB-000-NYN
 M8	3-pole	4 Plug Distribution box	PUR cable 5 m	V08-34PD-050-UYN
 M8	3-pole	8 Plug Distribution box	No cable (hood needed)	V08-38PB-000-NYN
 M8	3-pole	8 Plug Distribution box	PUR cable 5 m	V08-38PD-050-UYN
 M8	3-pole	8 Outputs – Hood	PUR cable 5 m	V08-38PH-050-UNN



## INDUCTIVE & PHOTOELECTRIC CABLES

### Group B

#### M8 4-PIN



open ended wire



connecting cables

CONNECTOR	PINS	CONFIG.	CABLE MATERIAL	CABLE LENGTH	WIRE	CABLE CONNECTION END	PINS	PART REFERENCE
M8	4-pole	straight	PUR	2 m	4	OPEN CABLE	–	S08-4FUG-020
M8	4-pole	straight	PUR	5 m	4	OPEN CABLE	–	S08-4FUG-050
M8	4-pole	straight	PUR	10 m	4	OPEN CABLE	–	S08-4FUG-100
M8	4-pole	right angle	PUR	2 m	4	OPEN CABLE	–	S08-4FUW-020
M8	4-pole	right angle	PUR	5 m	4	OPEN CABLE	–	S08-4FUW-050
M8	4-pole	right angle	PUR	10 m	4	OPEN CABLE	–	S08-4FUW-100
M8	4-pole	straight	PVC	2 m	4	OPEN CABLE	–	S08-4FVG-020
M8	4-pole	straight	PVC	5 m	4	OPEN CABLE	–	S08-4FVG-050
M8	4-pole	straight	PVC	10 m	4	OPEN CABLE	–	S08-4FVG-100
M8	4-pole	right angle	PVC	2 m	4	OPEN CABLE	–	S08-4FVW-020
M8	4-pole	right angle	PVC	5 m	4	OPEN CABLE	–	S08-4FVW-050
M8	4-pole	right angle	PVC	10 m	4	OPEN CABLE	–	S08-4FVW-100
M8	4-pole	straight	PUR	2 m	–	M12	4	S08-4FUG-020-12MG
M8	4-pole	right angle	PUR	2 m	–	M8	4	S08-4FUW-020-08MG
M8	4-pole	straight	PVC	2 m	–	M12	4	S08-4FVG-020-12MG
M8	4-pole	right angle	PVC	2 m	–	M8	4	S08-4FVW-020-08MG



# INDUCTIVE & PHOTOELECTRIC CABLES

## Group C

### M12 4-PIN



open ended wire



connecting cables











CONNECTOR	PINS	CONFIG.	CABLE MATERIAL	CABLE LENGTH	WIRE	CABLE CONNECTION END	PINS	PART REFERENCE
M12	4-pole	straight	PUR	2 m	4	OPEN CABLE	–	S12-4FUG-020
M12	4-pole	straight	PUR	5 m	4	OPEN CABLE	–	S12-4FUG-050
M12	4-pole	straight	PUR	10 m	4	OPEN CABLE	–	S12-4FUG-100
M12	4-pole	straight	PUR	15 m	4	OPEN CABLE	–	S12-4FUG-150
M12	4-pole	straight	PUR	20 m	4	OPEN CABLE	–	S12-4FUG-200
M12	4-pole	straight	PUR	25 m	4	OPEN CABLE	–	S12-4FUG-250
M12	4-pole	right angle	PUR	2 m	4	OPEN CABLE	–	S12-4FUW-020
M12	4-pole	right angle	PUR	5 m	4	OPEN CABLE	–	S12-4FUW-050
M12	4-pole	right angle	PUR	10 m	4	OPEN CABLE	–	S12-4FUW-100
M12	4-pole	right angle	PUR	15 m	4	OPEN CABLE	–	S12-4FUW-150
M12	4-pole	right angle	PUR	20 m	4	OPEN CABLE	–	S12-4FUW-200
M12	4-pole	right angle	PUR	25 m	4	OPEN CABLE	–	S12-4FUW-250
M12	4-pole	straight	PVC	2 m	4	OPEN CABLE	–	S12-4FVG-020
M12	4-pole	straight	PVC	5 m	4	OPEN CABLE	–	S12-4FVG-050
M12	4-pole	straight	PVC	10 m	4	OPEN CABLE	–	S12-4FVG-100
M12	4-pole	right angle	PVC	2 m	4	OPEN CABLE	–	S12-4FVW-020
M12	4-pole	right angle	PVC	5 m	4	OPEN CABLE	–	S12-4FVW-050
M12	4-pole	right angle	PVC	10 m	4	OPEN CABLE	–	S12-4FVW-100
M12	4-pole	straight	PUR	0.6 m	–	M12	4	S12-4FUG-006-12MG
M12	4-pole	straight	PUR	2 m	–	M12	4	S12-4FUG-020-12MG
M12	4-pole	straight	PUR	5 m	–	M12	4	S12-4FUG-050-12MG
M12	4-pole	straight	PVC	0.6 m	–	M12	4	S12-4FVG-006-12MG
M12	4-pole	straight	PVC	2 m	–	M12	4	S12-4FVG-020-12MG
M12	4-pole	straight	PVC	5 m	–	M12	4	S12-4FVG-050-12MG



## INDUCTIVE & PHOTOELECTRIC CABLES

### Group C

















#### FIELD ATTACHABLE CONNECTORS

CONNECTOR	PINS	CONFIG.	OUTER Ø	WIRE Ø	PART REFERENCE
 M12	3-pole	straight	3.0–5.0	0.08–0.38	S12-3FNG-000-NNT1
 M12	3-pole	straight	3.0–5.0	0.08–0.38	S12-3MNG-000-NNT1
 M12	4-pole	straight	3.0–5.0	0.08–0.38	S12-4FNG-000-NNT1
 M12	4-pole	straight	4.0–8.0	0.14–0.50	S12-4FNG-000-NNT2
 M12	4-pole	straight	5.5–8.0	0.50–1.00	S12-4FNG-000-NNT3
 M12	4-pole	right angle	3.0–5.0	0.08–0.38	S12-4FNW-000-NNT1
 M12	4-pole	straight	3.0–5.0	0.08–0.38	S12-4MNG-000-NNT1
 M12	4-pole	straight	4.0–8.0	0.14–0.50	S12-4MNG-000-NNT2
 M12	4-pole	straight	5.5–8.0	0.50–1.00	S12-4MNG-000-NNT3
 M12	4-pole	right angle	3.0–5.0	0.08–0.38	S12-4MNW-000-NNT1





## DISTRIBUTION BOXES

CONNECTOR	PINS	NUMBER OF CONNECTIONS	CONNECTION TYPE	PART REFERENCE
 M12	5-pole	Universal – Hood	No cable	V12-50PE-000-NNN
 M12	5-pole	4 Plug Distribution box	Connector M23	V12-54MG-023-NYN
 M12	5-pole	4 Plug Distribution box	No cable (hood needed)	V12-54PB-000-NYN
 M12	5-pole	4 Plug Distribution box	PUR cable 2 m	V12-54PD-020-UYN
 M12	5-pole	4 Plug Distribution box	PUR cable 5 m	V12-54PD-050-UYN
 M12	5-pole	4 Plug Distribution box	PUR cable 10 m	V12-54PD-100-UYN
 M12	5-pole	4 Plug Distribution box + Hood	PUR cable 5 m	V12-54PY-050-UYN
 M12	5-pole	8 Plug Metal Distribution box	PUR cable 5 m	V12-58MD-050-UYN
 M12	5-pole	8 Plug Metal Distribution box	PUR cable 10 m	V12-58MD-100-UYN
 M12	5-pole	8 Plug Metal Distribution box	Connector M23	V12-58MG-023-NYN
 M12	5-pole	8 Plug Distribution box	No cable (hood needed)	V12-58PB-000-NYN
 M12	5-pole	8 Plug Distribution box	PUR cable 2 m	V12-58PD-020-UYN
 M12	5-pole	8 Plug Distribution box	PUR cable 5 m	V12-58PD-050-UYN
 M12	5-pole	8 Plug Distribution box	PUR cable 10 m	V12-58PD-100-UYN
 M12	5-pole	8 Plug Distribution box + Hood	PUR cable 2 m	V12-58PY-020-UYN
 M12	5-pole	8 Plug Distribution box + Hood	PUR cable 5 m	V12-58PY-050-UYN











## INDUCTIVE & PHOTOELECTRIC CABLES

### Group D

#### M12 AC/DC 3-PIN



CONNECTOR	PINS	CONFIG.	CABLE MATERIAL	CABLE LENGTH	WIRE	CABLE CONNECTION END	PINS	PART REFERENCE
 UNF 1/2"	3	straight	PUR	2 m	3	 OPEN CABLE	–	S13-3FUG-020
 UNF 1/2"	3	straight	PUR	5 m	3	 OPEN CABLE	–	S13-3FUG-050
 UNF 1/2"	3	right angle	PUR	2 m	3	 OPEN CABLE	–	S13-3FUW-020
 UNF 1/2"	3	right angle	PUR	5 m	3	 OPEN CABLE	–	S13-3FUW-050



# UNIVERSAL MOUNTING BRACKETS

## Group E


### UNIVERSAL MOUNTING BRACKETS

	HOUSING SIZE COMPATIBILITY	TYPE	PART REFERENCE
	Ø 3	without limit stop	ASU-0001-030
	Ø 4	without limit stop	ASU-0001-040
	Ø 5	without limit stop	ASU-0001-050
	Ø 6.5	without limit stop	ASU-0001-065
	Ø 8	without limit stop	ASU-0001-080
	Ø 8	with limit stop	ASU-0002-080
	Ø 12 mm	without limit stop	ASU-0001-120
	Ø 12 mm	with limit stop	ASU-0002-120
	Ø 18 mm	without limit stop	ASU-0001-180
	Ø 18 mm	with limit stop	ASU-0002-180

### MECHANICAL STOPS

	INNER Ø	OUTER Ø	PLUNGER TYPE	MAX. FORCE ON HOUSING	MAX. FORCE ON PLUNGER	PART REFERENCE
	M5 × 0.5	M8 × 1	Flat <sup>1</sup>	8,000 N	2,000 N	AMS-0001-M08
	M5 × 0.5	M8 × 1	Spherical <sup>2</sup>	8,000 N	2,000 N	AMS-0002-M08
	M8 × 1	M12 × 1	Flat <sup>1</sup>	15,000 N	2,000 N	AMS-0001-M12
	M8 × 1	M12 × 1	Spherical <sup>2</sup>	15,000 N	2,000 N	AMS-0002-M12

**Material:** Steel XC 48, black  
**Max. tightening torque:** 30 Nm (M8), 50 Nm (M12)



## PHOTOELECTRIC MOUNTING BRACKETS

### Group F

	HOUSING SIZE COMPATIBILITY	BRACKET MATERIAL	PART REFERENCE
	C23PA series	Stainless steel V2A	LXW-C23PA-000
	C23PA series	Stainless steel V2A	LXW-C23PA-001
	C23PA series	Stainless steel V2A	LXW-C23PA-002
	C23PA series	Stainless steel V2A	LXW-C23PA-003
	DGI series MGI series	Stainless steel V2A	LXW-DGMGA-000














	HOUSING SIZE COMPATIBILITY	BRACKET MATERIAL	PART REFERENCE
	M18PA series	ABS/PMMA	LHW-M18PA-000
	M18PA series	ABS/PMMA	LLW-M18PA-000
	M18PA series	ABS/PMMA	LTW-M18PA-000
	M18PA series	ABS	LXW-M18PA-000
	M18PA series	Polyamide	LXW-M18PA-001

## PHOTOELECTRIC REFLECTORS

### Group G

#### REFLECTORS

	DIMENSIONS	PART REFERENCE
	Ø26 mm	LXR-0000-025
	Ø46 mm	LXR-0000-046
	Ø82 mm	LXR-0000-084
	32 × 20 mm	LXR-0001-032
	60 × 20 mm	LXR-0001-062
	Ø26 mm	LXU-0000-025
	Ø82 mm	LXU-0000-084
	32 × 20 mm	LXU-0001-032
	60 × 41 mm	LXU-0001-064



# SENSOR TESTER

## Group H

	PART REFERENCE
	ATE-0000-010

## CABLES / CONNECTORS

### S12-4FAG-020[-NNLN-12MG]

<b>CONNECTION CABLE</b>	<b>S</b>	<b>CABLE EXIT (MALE)</b>	
<b>CONNECTOR SIZE FEMALE</b>		Straight	<b>G</b>
M8	<b>08</b>	Right-angle	<b>W</b>
M12	<b>12</b>	<b>CONNECTOR TYPE</b>	
M12 AC/DC	<b>13</b>	Male (plug)	<b>M</b>
M23	<b>23</b>	Female (socket)	<b>F</b>
<b>NUMBER OF POLES</b>		<b>CONNECTOR SIZE MALE</b>	
3-pole	<b>3</b>	M8	<b>08</b>
4-pole	<b>4</b>	M12	<b>12</b>
5-pole	<b>5</b>	M23	<b>23</b>
8-pole	<b>8</b>	<b>CONNECTION TYPE</b>	
11-pole	<b>B</b>	Standard	<b>N</b>
19-pole	<b>J</b>	Quick-lock	<b>Q</b>
<b>CONNECTOR TYPE</b>		Cable Ø3.0–5.0 mm / wire 0.08–0.38 mm <sup>2</sup>	<b>1</b>
Female (socket)	<b>F</b>	Cable Ø4.0–8.0 mm / wire 0.14–0.50 mm <sup>2</sup>	<b>2</b>
Male (plug)	<b>M</b>	Cable Ø5.5–8.0 mm / wire 0.5–1.0 mm <sup>2</sup>	<b>3</b>
<b>CABLE MATERIAL</b>		<b>APPLICATION</b>	
No cable	<b>N</b>	Standard	<b>N</b>
PVC	<b>V</b>	Food	<b>L</b>
PUR	<b>U</b>	RFID	<b>R</b>
TPE-S	<b>A</b>	Field attachable	<b>T</b>
<b>CABLE EXIT (FEMALE)</b>		Safety	<b>S</b>
Straight	<b>G</b>	<b>EXECUTION</b>	
Right-angle	<b>W</b>	Standard or no cable	<b>N</b>
<b>CABLE LENGTH</b>		Shielded	<b>W</b>
No cable	<b>000</b>	<b>LED</b>	
0.3 m	<b>003</b>	Yes, PNP	<b>Y</b>
0.6 m	<b>006</b>	Yes, NPN	<b>Z</b>
1 m	<b>010</b>	No	<b>N</b>
1.5 m	<b>015</b>		
2 m (standard)	<b>020</b>		
5 m	<b>050</b>		
10 m	<b>100</b>		
15 m	<b>150</b>		
20 m	<b>200</b>		
25 m	<b>250</b>		



DISTRIBUTION BOXES AND T-CONNECTORS

# V12-58PD-050-UYN (-###)

## DISTRIBUTION BOX OR T-CONNECTOR

V

## CONNECTIONS

Accessory	00
M8	08
M12	12

## POLE NUMBER OF CONNECTIONS

3-pole	3
4-pole	4
5-pole	5
8-pole	8

## NUMBER OF CONNECTIONS

Hood for all types	0
2 connections	T
4 connections	4
6 connections	6
8 connections	8
10 connections	1

## MATERIAL

Plastic	P
Metal	M

## TYPE

Distribution box with cable / T-connector	D
Distribution box for straight connection	G
Distribution box for right-angle connection	W
Base element without hood	B
Hood with cable	H
Hood without cable	E
Base element + hood with cable	Y

## SPECIAL EXECUTIONS

## TECHNOLOGY

Standard (passive distribution box)	N
Wiring according diagram no.	#

## LED

Yes	Y
No	N

## CABLE MATERIAL

No cable	N
PVC	V
PUR	U

## CONNECTION

No cable	000
Cable 0.3 m	003
Cable 2 m	020
Cable 5 m	050
Cable 10 m	100
Connector M12	012
Connector M23	023



# ACCESSORIES REFERENCE KEY

## MISCELLANEOUS

### APT-0001-010

#### ACCESSORY A

#### ACCESSORY TYPE

Mechanical stop	MS
Protective tube	PT
Tester	TE

#### MATERIAL

Protective tubes, Tester	
Material PTFE, spiral, split	000

#### DIMENSIONS

<b>Mechanical stops</b>	
Outer diameter M08=M8 × 1 thread	M08
Outer diameter M12=M12 × 1 thread	M12
<b>Protective tubes</b>	
Length in dm (1 m)	010
Length in dm (10 m)	100

#### SERIES

<b>Mechanical stops</b>	
Flat plunger	1
Spheric plunger	2
<b>Protective tubes</b>	
Inner Ø3.5 mm / Outer Ø6.0 mm	0
Inner Ø6.5 mm / Outer Ø10.0 mm	1
Inner Ø13.0 mm / Outer Ø17.5 mm	2
Inner Ø19.0 mm / Outer Ø23.5 mm	3
<b>Tester</b>	
Base	0

## PHOTOELECTRIC MOUNTING BRACKETS AND SPECIAL MOUNTINGS

### LXW-C23PA-000

#### PHOTOELECTRIC SENSOR L

#### SENSOR TYPE

With background suppression	H
Through-beam sensor	L
Diffuse sensor	T
Accessories	X

#### DEVICE TYPE

Mounting bracket	W
------------------	---

#### HOUSING SIZE COMPATIBILITY

C23PA series	C23PA
DGI, MGI series	DGM
M18PA series	M18PA

#### INCREMENTAL NUMBER

Incremental number	000
Incremental number	001
Incremental number	002
Incremental number	003

#### PERFORMANCE

Standard	A, B
----------	------

#### HOUSING MATERIAL

Stainless steel V4A	G
Plastic	P



MOUNTING BRACKETS

ASU-0001-030

ACCESSORY **A**

ACCESSORY TYPE

Mounting brackets	<b>SU</b>
-------------------	-----------

FIXTURE

Standard Basic fixture	<b>00</b>
Standard Cylindrical fixture	<b>30</b>

MATERIAL

Plastic	<b>0</b>
Stainless steel V2A	<b>1</b>
Coated steel	<b>4</b>

DIMENSIONS

Ø 3 mm	<b>030</b>
Ø 4 mm	<b>040</b>
Ø 5 mm	<b>050</b>
Ø 6.5 mm	<b>065</b>
Ø 8 mm	<b>080</b>
Ø 12 mm	<b>120</b>
Ø 18 mm	<b>180</b>
Ø 30 mm	<b>300</b>

TYPE

Without limit stop	<b>1</b>
With limit stop	<b>2</b>
For C44	<b>3</b>
For 4#5#	<b>4</b>
For C1717	<b>5</b>

PHOTOELECTRIC REFLECTORS

LXR-0000-025

PHOTOELECTRIC SENSOR **L**

SENSOR TYPE

Accessories	<b>X</b>
-------------	----------

DEVICE TYPE

Reflector	<b>R</b>
Reflector for UV	<b>U</b>

SHAPE

Cylindrical reflector	<b>0000</b>
Rectangular reflector	<b>0001</b>

DIMENSIONS

<b>Cylindrical reflectors</b>	
Ø 26 mm	<b>025</b>
Ø 46 mm	<b>046</b>
Ø 82 mm	<b>084</b>
<b>Rectangular reflectors</b>	
32 × 20 mm	<b>032</b>
60 × 20 mm	<b>062</b>
60 × 41 mm	<b>064</b>



ALL OVER THE WORLD

#### EUROPE

Austria  
Belgium  
Croatia  
Czech Republic  
Denmark  
Estonia  
Finland  
**France\***  
**Germany\***  
Great Britain  
Greece  
Hungary  
Ireland  
**Italy\***  
Luxembourg  
Netherlands  
Norway  
Poland  
**Portugal\***  
Romania  
Russian Federation

Serbia  
Slovakia  
Slovenia  
Spain  
Sweden  
**Switzerland\***  
Turkey  
Ukraine

#### AFRICA

Morocco  
South Africa

#### THE AMERICAS

Argentina  
**Brazil\***  
Canada  
Chile  
**Mexico\***  
Peru  
**United States\***

#### ASIA

**China\***  
**India\***  
Indonesia  
**Japan\***  
Korea  
Malaysia  
Pakistan  
Philippines  
Singapore  
Taiwan  
Thailand

#### AUSTRALASIA

Australia  
New Zealand

#### MIDDLE EAST

Israel  
United Arab Emirates

Terms of delivery and right to change design reserved.

\*Contrinex subsidiary

#### HEADQUARTERS

**CONTRINEX AG** Industrial Electronics  
Route du Pâqui 3 – PO Box – CH-1720 Corminboeuf – Switzerland  
Tel: +41 26 460 46 46 – Fax: +41 26 460 46 40  
Internet: [www.contrinex.com](http://www.contrinex.com) – E-mail: [info@contrinex.com](mailto:info@contrinex.com)



[www.contrinex.com](http://www.contrinex.com)

**PLUS+AUTOMATION**  
HELPING YOU #MAKESENSEOFSENSORS

0121 58 222 58

[Sales@PLUSAutomation.co.uk](mailto:Sales@PLUSAutomation.co.uk)  
[www.PLUSAutomation.co.uk](http://www.PLUSAutomation.co.uk)



© **CONTRINEX AG 2022**  
900-307-002 – KAY – 08.22 – 500